
Detonation flame arrester

KITO® FD4-Det4-IIB3-...-1.2

KITO® FD4-Det4-IIB3-...-1.2-T





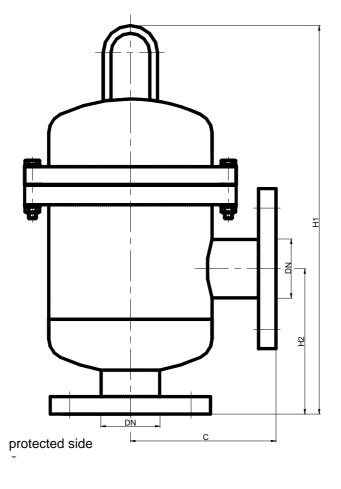

Example to order: KITO® FD4-Det4-IIB3-50-1.2 (Design DN 50 PN 16)

Type examination certificate to DIN EN ISO 16852 and C € -designation in accordance to ATEX-Guideline 94/9/EC

DN	ANSI	С	Н1	H2	kg*
25 PN 40	1"	150	400	150	18,5
32 PN 40	1 ¼"				19
40 PN 40	1 1/2"				20
50 PN 16	2"				21

Dimensions in mm

Standard design

* weight refers to the standard design

performance curves: G 0.19.5 N

Design subject to change

housing / cover : steel, stainless steel mat. no. 1.4571

gasket : HD 3822, PTFE

KITO[®] flame arrester element : completely interchangeable KITO[®] casing / grid : stainless steel mat. no. 1.45 : stainless steel mat. no. 1.4571 temperature sensor : PT 100 (option); connection 3/8" : DIN EN 1092-1 Form A, flange connections

ANSI 150 lbs

Application

For installation into pipes to protect containers and components against stable detonation of flammable liquids and gases.

Tested and approved as detonation flame arrester type 4. Approved for all substances of explosion groups IIA1 to IIB3 with a maximum experimental safe gap (MESG) ≥ 0.65 mm. Working unidirectional in pipes, whereby an operating pressure of 1.2 bar abs. and an operating temperature of 60℃ must not be exceeded.

Provided with one temperature sensor (PT 100) the armature is certified against short time burning from one side. If only one thermal sensor is attached, it must be installed into that part of the body from which a fire is expected.


The installation is not dependent on the position and both directions of flow are possible. During installation, please observe the direction of detonation and the indication "protected side".



Detonation flame arrester KITO[®] FD4-Det4-IIB3-...-1.2 KITO[®] FD4-Det4-IIB3-...-1.2-T G 19.5 N

Flow capacity V based on air of a density ρ = 1.29 kg/m³ at T = 273 K and atmospheric pressure p = 1.013 mbar. For other gases the flow can be approximately calculated by

$$\overset{\cdot}{V} = \overset{\cdot}{V}_b \cdot \sqrt{\frac{\rho_b}{1.29}} \ or \qquad \overset{\cdot}{V}_b = \overset{\cdot}{V} \cdot \sqrt{\frac{1.29}{\rho_b}}$$

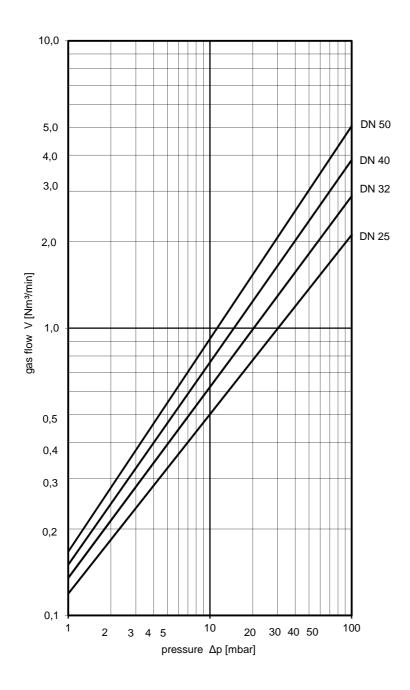

Design subject to change.