


Full, empty and demand indicator

for any mounting position
large range of applications

Signal contact	2 A / 250 V AC potential-free
Type of protection	IP66 in accordance with DIN EN 60529
Maintenance	none

3

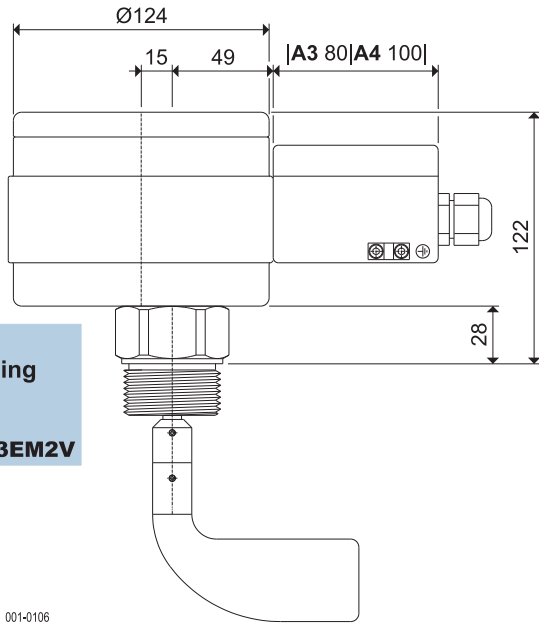


A3 or A4 Round housing

Order code
DF21AnCnG3EM2V


001-0106

A1 or A2 Compact housing

Order code
DF21AnCnG3AM2V

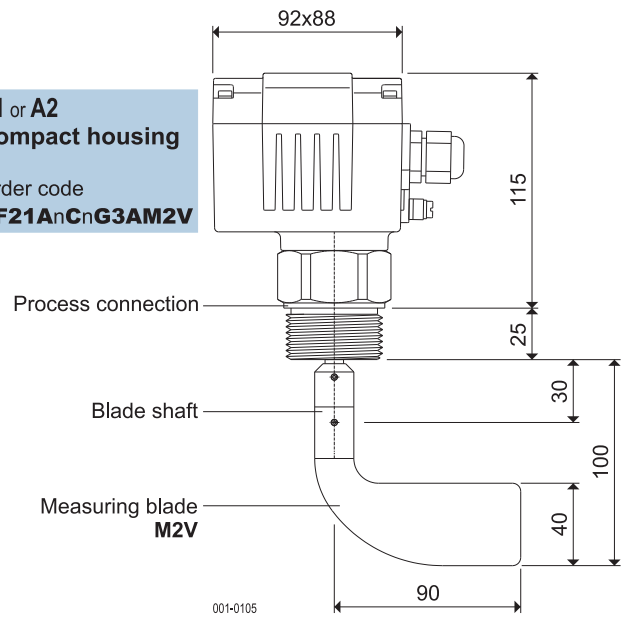


You will find further technical details under appliance information **DF-GI-**

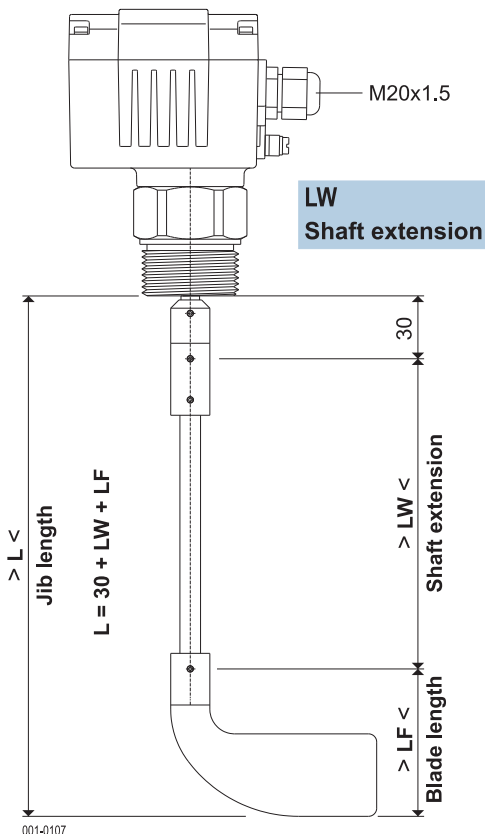

LW Shaft extension

001-0107

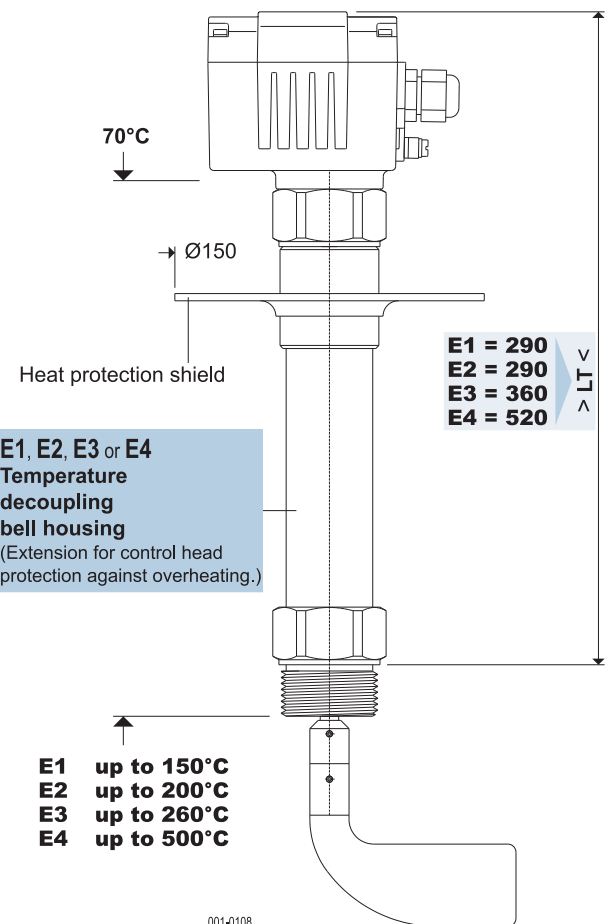

E1, E2, E3 or E4 Temperature decoupling bell housing

(Extension for control head protection against overheating.)

E1 = 290
E2 = 290
E3 = 360
E4 = 520

E1 up to 150°C
E2 up to 200°C
E3 up to 260°C
E4 up to 500°C

001-0108

