

### Full, empty and demand indicator

for vertical mounting  
with rope shaft

Signal contact

2 A / 250V AC potential-free



Type of protection

IP66 in accordance with DIN EN 60529

Maintenance

none

3

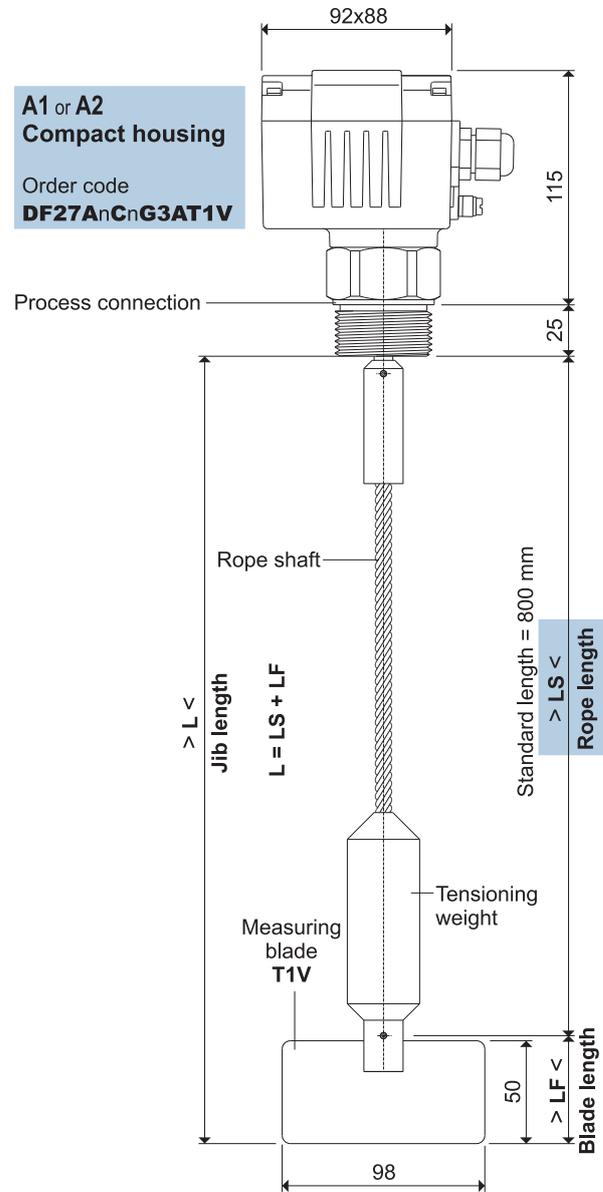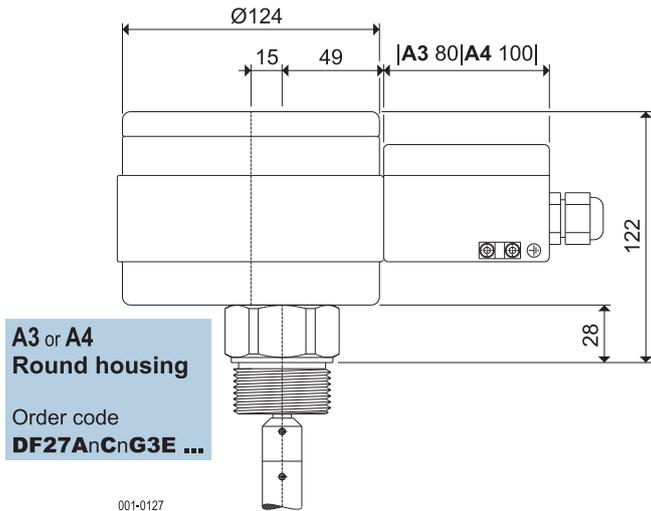

You will find further technical details under appliance information **DF-GI-..**

