


PTFE insulated heating tape

Isopad IT-TeMS is a preterminated and flexible heating tape. IT-TeMS 2 is used in applications ranging from simple frost protection to temperature maintenance on short pipework and apparatus as well as for general container heating applications.

If more power is required, the use of the TeMS 4 or TeMS 6 heating tapes is recommended. The parallel arrangement of the heating conductors ensures a wide heat-transfer surface.

The temperature depends on the power and application. Please make sure that the heating tape does not exceed the maximum withstand temperature.

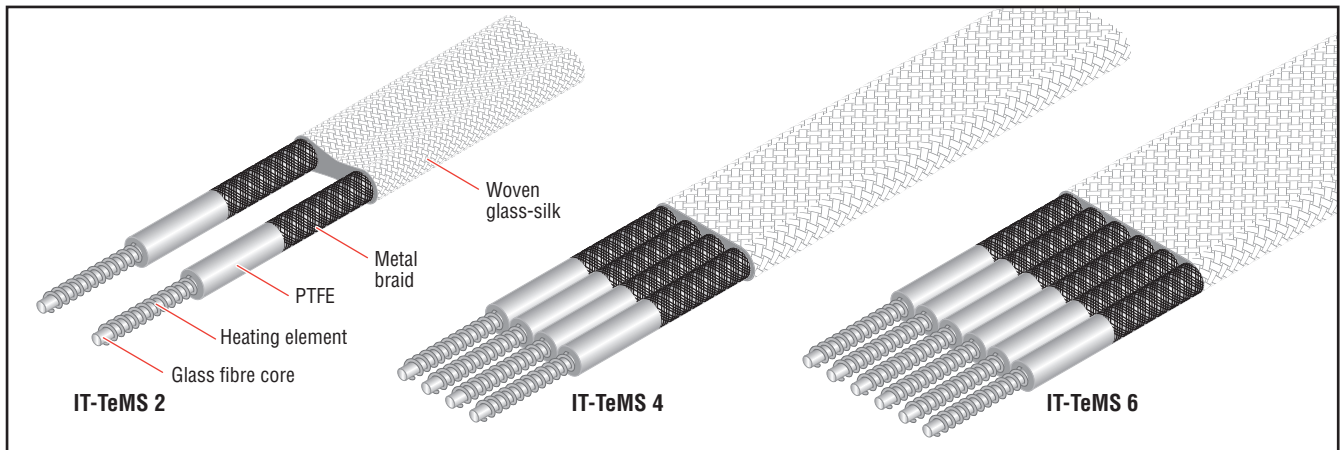

Area Specifications

Area classification	Nonhazardous, ordinary area
Ingress protection	IP64
Electrical protection class	Class I
Maximum withstand temperature (power off)	260°C

Standard Manufacturing Sizes

Width	IT-TeMS 2 is 25 mm, IT-TeMS 4 is 26 mm, IT-TeMS 6 is 27 mm $\pm 10\%$
Thickness	4 mm $\pm 10\%$

Heater Construction

Type	Resistance heating cable
Material	Various alloys
Material insulation	PTFE
Material of outer sheath	Woven glass-silk

Lead Connection

Connection length	1.5 m
Cross section	3 x 1.5 mm ²
Maximum operating temperature	180°C
Insulation material	Silicone

Technical Data

Frequency	50-60 Hz
Nominal operating voltage	230 Vac
Maximum operating temperature	260°C
Minimum bend radius	10 mm
Minimum spacing	5 mm

Ordering Information

IT-TeMS 2	Part number	Length⁽¹⁾ (m)	Nominal Power⁽²⁾ (W)	Nominal Voltage (Vac)
	584 216-000	1.10	50	230
	411 376-000	2.20	100	230
	067 444-000	3.50	140	230
Other lengths and power specifications, etc., available upon request	846 778-000	5.50	250	230
	700 890-000	8.00	340	230
	426 148-000	11.00	500	230
	943 982-000	14.00	610	230
	852 336-000	18.00	730	230
IT-TeMS 4	458 786-000	1.10	100	230
	149 158-000	2.20	200	230
Other lengths and power specifications, etc., available upon request	802 292-000	3.50	280	230
	124 922-000	5.50	490	230
	299 284-000	8.00	670	230
	718 760-000	11.00	990	230
	927 204-000	14.00	1260	230
IT-TeMS 6	755 718-000	1.00	160	230
	533 964-000	2.00	330	230
Other lengths and power specifications, etc., available upon request	184 778-000	3.00	490	230
	824 016-000	5.00	820	230
	064 196-000	7.00	1150	230
	744 968-000	10.00	1640	230

⁽¹⁾ Tolerances <2000 mm ± (1% + 50 mm)
>2000 mm ± (2% + 100 mm)

⁽²⁾ Tolerances ±10%

Worldwide Headquarters**Tyco Thermal Controls**7433 Harwin Drive
Houston, TX 77036

USA

Tel: 800-545-6258

Tel: 650-216-1526

Fax: 800-527-5703

Fax: 650-474-7711

info@tycothermal.com

www.tycothermal.com**Canada****Tyco Thermal Controls**

250 West St.

Trenton, Ontario

Canada K8V 5S2

Tel: 800-545-6258

Fax: 800-527-5703

Latin America**Tyco Thermal Controls**

7433 Harwin Drive

Houston, TX 77036

United States

Tel: 713-868-4800

Tel: 713-735-8645

Fax: 713-868-2333

Europe, Middle East, Africa (EMEA)**Tyco Thermal Controls**

Romeinse Straat 14

3001 Leuven

België / Belgique

Tel: +32 16 213 511

Fax: +32 16 213 603

Asia Pacific**Tyco Thermal Controls**

20F, Innovation Building

1009 Yi Shan Rd

Shanghai 200233

P.R.China

Tel: +86 21 2412 1688

Fax: +86 21 5426 2937 / 5426 3167

Tyco, Alliance Integrated Systems, AMC, AutoMatrix, AutoSol, BTV, CapaciSense, Chemelex, DHSX, DigiTrace, DigiTrace logo, DigiTrace Supervisor, Duoterm, ElectroMelt, EM2XR, FHSM, FHSC, FlexFit, FlexiClic, Flowguard, FreezeTrace, FreezGard, Frostex, Flostex Plus, Frostguard, FroStop, FSE, Gardian, HAK, Handvise, HBTV, HCCL, HotCap, HQT, HTPG, HTPI, HWAT, HXTV, IceStop, Interlock, Isocable, Isodrum, Isoheat, Isomantle, Isopad, Isopad Frostguard, Isopad logo, Isopanel, Isotape, Isotherm, JBM, JBS, K-Flex, K-Flex logo, KHE, KHH, KHL, KHP, KTV, Labsafe, LBTV, LHC, LHFV, LHRV, Metabond, Mini WinterGard, Miser WinterGard, MoniTrace, Multi-plus, NGC, PetroTrace, PLI, PolyMatrix, Pyro CiC, PyroFLX, Pyromaster, Pyropak, Pyrosil, PyroSizer, Pyrotenax, Pyrotenax Designer, Pyrotenax logo, QTVR, QuickNet, QuickNet logo, QuickStat, QuickTerm, RayClic, RaySol, RayStat, Retro WinterGard, RHS, RHSC, RHSM, RMM2, SBF, SBV, SC, SHC, Sheathmaster, ShowerGuard, SLBTV, Smart heat for Comfort and Safety, SnoCalc, SnoCalc logo, STS, System 500, System 1850, System 1850-SE, System 2000, System 2200, T2, T2 logo, T2Blue, T2QuickNet, T2Red, T2Reflecta, TankCalc Plus, TempBus, Thermoheat, ThermoLimit, Thermo-Line, Total Care in Heat-tracing, Touch, Trac-Loc, Trac Calc, TraceCalc Net, TraceCalc Net logo, TraceCalc Pro logo, TraceGuard 277, TraceMaster, Tracer, Tracer logo, TRACERLYNX, TRACERLYNX logo, TraceStat, TraceTek, TraceTek logo, TruckPak, VLBT, VLKTV, VPL, We manage the heat you need, WinterGard, WinterGard logo, WinterGard Plus, WinterGard Wet, XL-ERATE, XL-ERATE logo, XL-Trace, XTV and Zero EMI are registered and/or unregistered trademarks of Tyco Thermal Controls LLC or its affiliates.

All other trademarks are the property of their respective owners.

tyco

Thermal Controls

Important: All information, including illustrations, is believed to be reliable. Users, however, should independently evaluate the suitability of each product for their particular application. Tyco Thermal Controls makes no warranties as to the accuracy or completeness of the information, and disclaims any liability regarding its use. Tyco Thermal Controls' only obligations are those in the Tyco Thermal Controls Standard Terms and Conditions of Sale for this product, and in no case will Tyco Thermal Controls or its distributors be liable for any incidental, indirect, or consequential damages arising from the sale, resale, use, or misuse of the product. Specifications are subject to change without notice. In addition, Tyco Thermal Controls reserves the right to make changes—without notification to Buyer—to processing or materials that do not affect compliance with any applicable specification.