


Silicone drum heating band

Heaters are often used to promote effective processing of high viscosity media or gases in barrels, drums, or gas cylinders. These silicone heating bands are a simple, low-

cost way to heat drums and gas bottles. There are two versions available. One (Version A) is supplied with internal Pt100 sensor and temperature limiter to 180°C.

The other (Version B) is supplied complete with a built-in adjustable thermostat with a control range of 10°C to 218°C. An external controller-box is available.

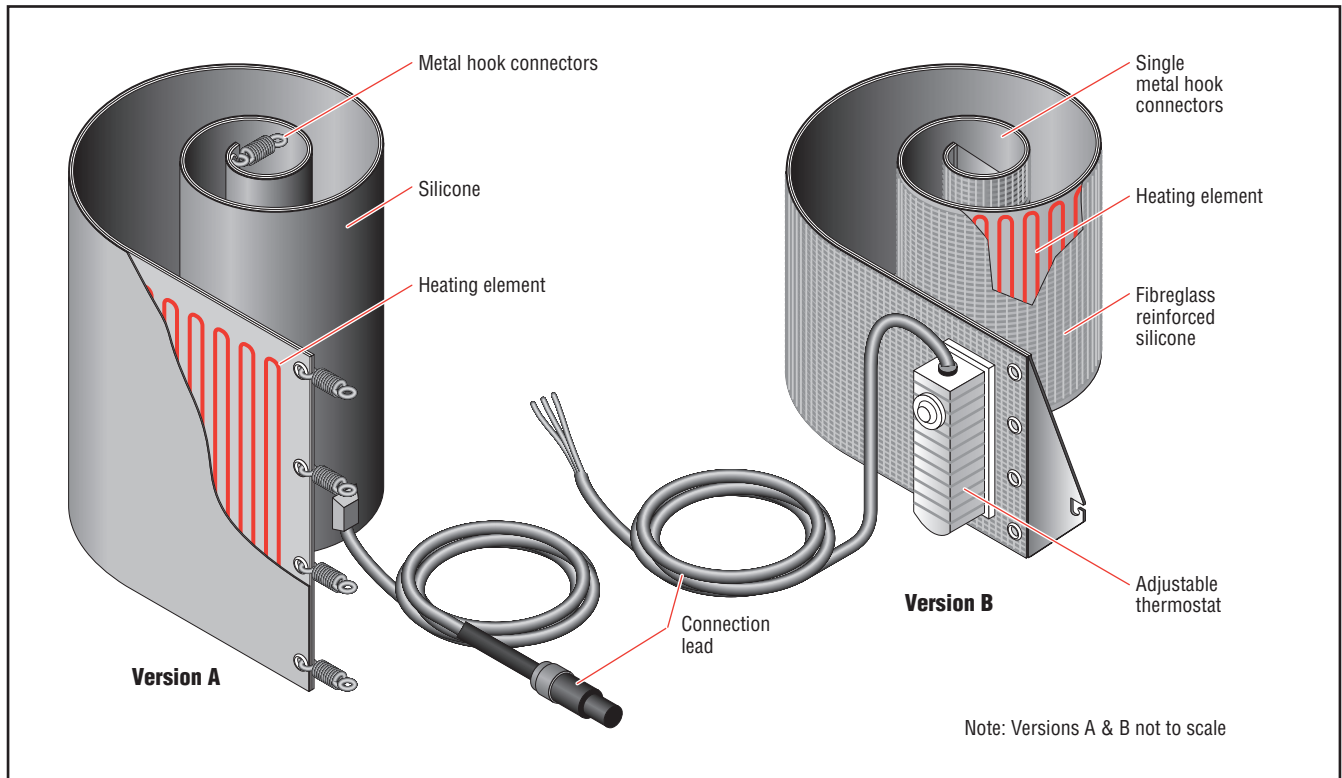

Area Specifications

Area classification	Nonhazardous, ordinary area
Ingress protection	IP65
Electrical protection class	Class I
Storage temperature	-20 to +50°C
Minimum installation temperature	-20°C

Standard Manufacturing Sizes

Length	1760 / 1677 / 1384 mm \pm 4%
Width	230 / 102 mm \pm 2.5%

Heater Construction

Type	Resistance heating cable
Material	Various alloys
Material of carrier	Version A is silicone or silicone-glass-silk. Version B is fibreglass reinforced silicone.

Lead Connection

Sensor type	Version A optional Pt100
-------------	--------------------------

Connection length, lead cross section, maximum operating temperature, connection lead material and thermostat depend on design
--

Technical Data

Frequency	50-60 Hz
Maximum operating voltage	230 / 240 / 120 Vac
Maximum power	1100 / 1200 / 1000 W
Maximum operating temperature	218°C (or 180°C if optional temperature limiter is included)
Minimum bend radius, maximum area load and maximum compression strength depend on design	

Ordering Information

Part number	For standard sizes (Ltr) (m ²)	Length ⁽¹⁾ (L) (mm)	Width ⁽¹⁾ (H) (mm)	Nominal Voltage (Vac)	Nominal Power ⁽²⁾ (W)
Version with internal Pt100 sensor and temperature limiter to 180°C (Version A)					
171538-000	200	1760	230	230	1100
257692-000 (Controller for 1 band heater)				230	
972114-000 (Controller for 3 band heaters)				230	
Versions with adjustable thermostat 10°C to 218°C (Version B)					
791428-000	200	1677	102	240	1200
631912-000	110	1384	102	240	1000
118374-000	200	1677	102	120	1200
450166-000	110	1384	102	120	1000

⁽¹⁾ Tolerances < 400 (±2.5) / > 400 (±4.0)

⁽²⁾ Tolerances ±10%



France :

THERMOCOAX SAS

40 Bd Henri Sellier
F 92156 SURESNES Cedex
Tél. : +33 1 41 38 80 50
Fax : +33 1 41 38 80 70
info@thermocoax.com

Germany :

THERMOCOAX ISOPAD GmbH

Englerstrasse 11
D-69 126 HEIDELBERG
Tél. : +49 6221 3043-0
Fax : +49 6221 3043-956
isopad.info@thermocoax.com

USA :

THERMOCOAX Inc.

6825 Shiloh Road East,
Ste B-3
ALPHARETTA, GA 30005
Tél. : +1 800 298 3345
Fax : +1 678 947 4450
info@thermocoax.us

UK :

THERMOCOAX UK Ltd.

Office N° 5
Manor Farm
Aubourn,
Lincolnshire LN5 9DX
Tél. : +44 (1522) 789 900
Fax : +44 (1522) 789 902
info-uk@thermocoax.com

CHINA :

法国热缆公司
四川省成都市蛟龙工业港双流园
区涪江路11座
电话 : 13701325459
info-china@thermocoax.com

Important : All information, including illustrations, is believed to be reliable. Users, however, should independently evaluate the suitability of each product for their particular application. THERMOCOAX makes no warranties as to the accuracy or completeness of the information, and disclaims any liability regarding its use. THERMOCOAX only obligations are those in the THERMOCOAX Standard Terms and Conditions of Sale for this product, and in no case will THERMOCOAX or its distributors be liable for any incidental, indirect, or consequential damages arising from the sale, resale, use, or misuse of the product. Specifications are subject to change without notice. In addition, THERMOCOAX reserves the right to make changes—without notification to Buyer—to processing or materials that do not affect compliance with any applicable specification.