


## Standard silicone heating mat

Isopad IP-DASI silicone heating mats for industrial use are selected where excellent flexibility and high temperature resistance in thermal processes are required. The processed silicones have good resistance to ozone, oxygen, weathering, ageing effects, bacterial and fungal attacks. They are also highly resistant to various chemicals such as alcohol, acetylene, mineral oil, acids, glucose, and glues.

Used according to the manual instructions, IP-DASI heaters do not exceed the maximum panel temperature of 200°C, so no temperature sensor or controller is necessary.

The maintain temperature depends on the local environment. If you want more precise control, you can add an optional Isopad or DigiTrace controller and temperature sensor.

Special customized heating panels are available on demand; see our IP-SM datasheet for options. Please contact your local sales person for more details.

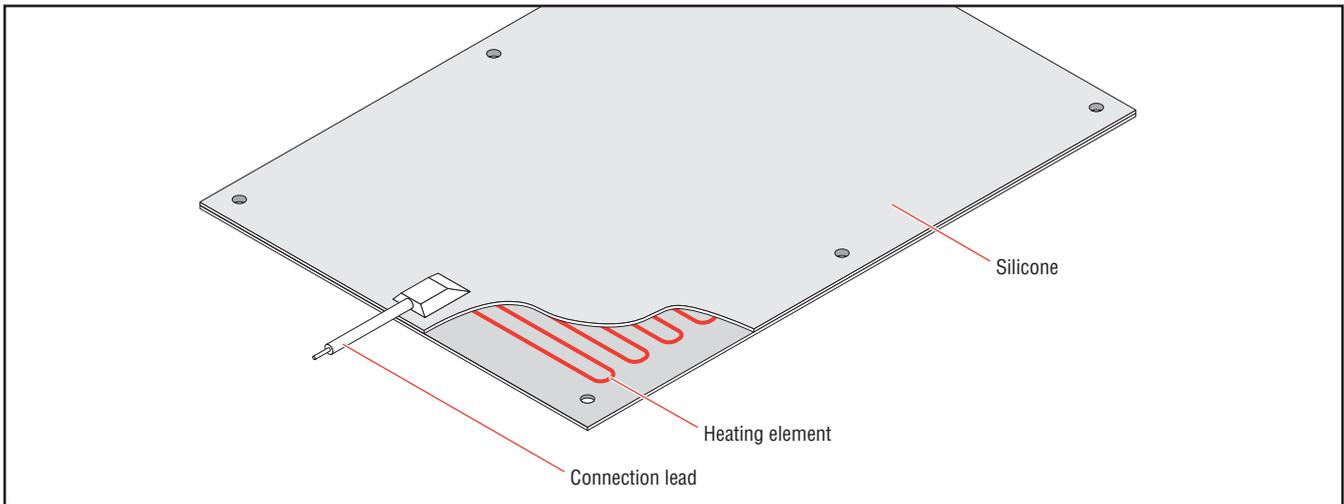

### Area Specifications

Area classification	Nonhazardous, ordinary area
Ingress protection	IP65
Electrical protection class	Class II
Maximum withstand temperature (power off)	200°C
Storage temperature	-20 to +40°C
Minimum installation temperature	-45°C

### Heater Construction

Type	Resistance heating cable
Material	Various alloys
Carrier	Silicone mat
Material insulation	Silicone
Fixing and closure type	Holes 4 mm diameter

### Lead Connection

Connection length	1.0 m
Cross section	2 x 0.75 mm <sup>2</sup>
Maximum operating temperature	180°C
Insulation material	Silicone

**Technical Data**

Frequency	50-60 HZ
Nominal operating voltage	230 Vac
Minimum insulation resistance	100 MΩ
Maximum operating temperature	200°C
Minimum bend radius	15 mm
Maximum area load	35 W/dm <sup>2</sup>
Maximum compression strength	40 N/cm <sup>2</sup>


**Ordering Information**

Part number	For standard sizes	Length <sup>(1)</sup> (L) (mm)	Width <sup>(1)</sup> (W) (mm)	Thickness <sup>(2)</sup> (S) (mm)	Nominal Voltage (Vac)	Nominal Power <sup>(3)</sup> (W)	Weight (kg)
375894-000	DINA4	297	210	3.3	230	220	0.35
524736-000	DINA3	420	297	3.3	230	440	0.7
188460-000	DINA2	594	420	3.3	230	980	1.2
611654-000	DINA1	841	594	3.3	230	1960	2.3

<sup>(1)</sup> Tolerances <400 mm ±2.5 mm  
>400 mm ±4.0 mm

<sup>(2)</sup> Tolerances ±0.5 mm

<sup>(3)</sup> Tolerances ±10%



**France :**  
**THERMOCOAX SAS**  
40 Bd Henri Sellier  
F 92156 SURESNES Cedex  
Tél. : +33 1 41 38 80 50  
Fax : +33 1 41 38 80 70  
info@thermocoax.com

**Germany :**  
**THERMOCOAX ISOPAD GmbH**  
Englerstrasse 11  
D-69 126 HEIDELBERG  
Tél. : +49 6221 3043-0  
Fax : +49 6221 3043-956  
isopad.info@thermocoax.com

**USA :**  
**THERMOCOAX Inc.**  
6825 Shiloh Road East,  
Ste B-3  
ALPHARETTA, GA 30005  
Tél. : +1 800 298 3345  
Fax : +1 678 947 4450  
info@thermocoax.us

**UK :**  
**THERMOCOAX UK Ltd.**  
Office N° 5  
Manor Farm  
Aubourn,  
Lincolnshire LN5 9DX  
Tél. : +44 (1522) 789 900  
Fax : +44 (1522) 789 902  
info-uk@thermocoax.com

**CHINA :**  
法国热缆公司  
四川省成都市蛟龙工业港双流园  
区涪江路11座  
电话 : 13701325459  
info-china@thermocoax.com

**Important :** All information, including illustrations, is believed to be reliable. Users, however, should independently evaluate the suitability of each product for their particular application. THERMOCOAX makes no warranties as to the accuracy or completeness of the information, and disclaims any liability regarding its use. THERMOCOAX only obligations are those in the THERMOCOAX Standard Terms and Conditions of Sale for this product, and in no case will THERMOCOAX or its distributors be liable for any incidental, indirect, or consequential damages arising from the sale, resale, use, or misuse of the product. Specifications are subject to change without notice. In addition, THERMOCOAX reserves the right to make changes—without notification to Buyer—to processing or materials that do not affect compliance with any applicable specification.