

Isopad platen heater

Isopad platen heaters (IPH) have been designed to blend the benefits of an electric radiant heat source and the design requirements of press plates. Due to a uniform heat density they are ideally suited to coating and lamination processes and have been widely adopted in high quality applications such as solar panel manufacture.


At the core is a mineral insulated (MI) heating cable which can supply temperatures

up-to 1000°C, the MI heating cable is manufactured into a hermetically sealed heating element utilising laser welding technology, formed to deliver optimum heat density then fully encapsulated in a metallic platen ready for use.

The long element lengths made possible by MI cables minimise the number of vacuum feedthroughs required thus reducing the number of failure modes in the final

assembly. Additional reliability is achieved using multiple temperature sensors with the option of fully integrated and vacuum tested power and sensor feedthroughs.

Thermocoax can provide a customised platen heater to specific customer design requirements or engineer from a simple design outline.

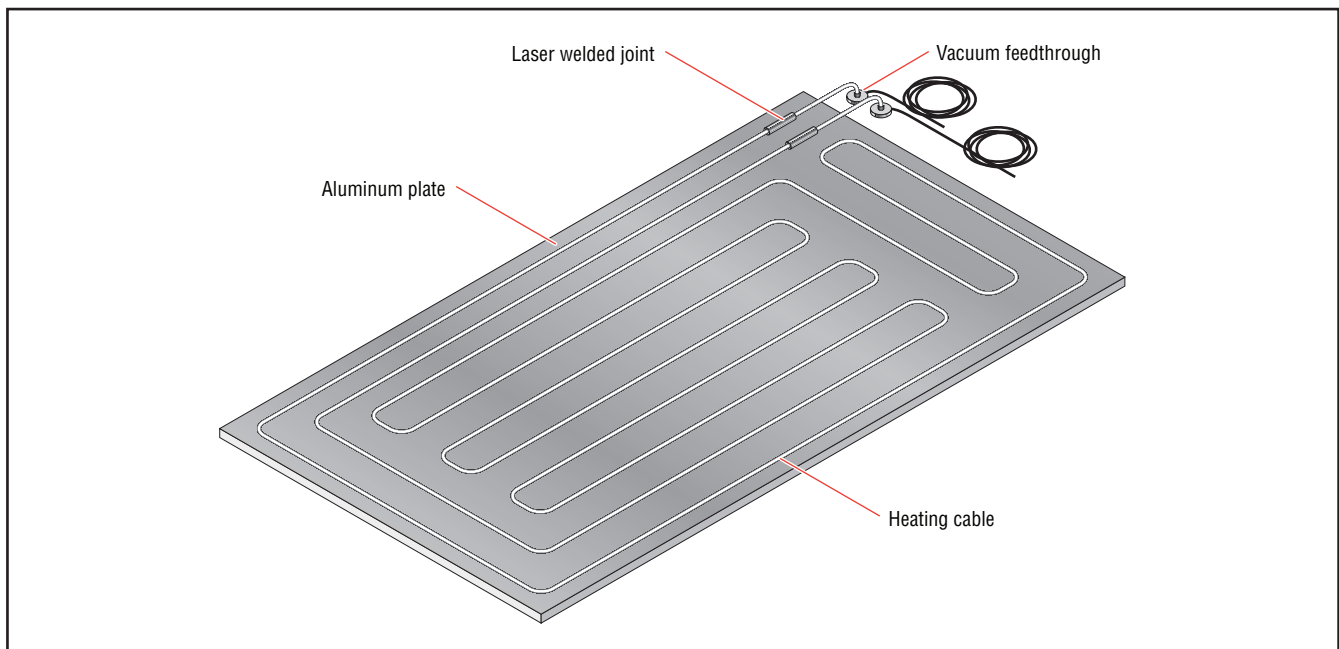

Area Specifications

Area classification	Nonhazardous, ordinary area
Ingress protection	IP68
Electrical protection class	Class I
Maximum withstand temperature (power off)	1000°C
Minimum installation temperature	-60°C

Heater Construction

Type	Resistance heating cable
Material	Various alloys
Material of insulation	Magnesium oxide (MgO)
Material of outer sheath	Depending on design

Technical Data

Maximum operating voltage	300/500 Vac
Maximum operating temperature	1000°C (depending on plate material)

Options

Vacuum feedthrough of different style for heater and sensor connection; the length of the cold lead, the number of wires and optional vacuum feedthrough can be designed to customer requirements in terms of space, temperature and electrical needs.



France :

THERMOCOAX SAS

40 Bd Henri Sellier
F 92156 SURESNES Cedex
Tél. : +33 1 41 38 80 50
Fax : +33 1 41 38 80 70
info@thermocoax.com

Germany :

THERMOCOAX ISOPAD GmbH

Englerstrasse 11
D-69 126 HEIDELBERG
Tél. : +49 6221 3043-0
Fax : +49 6221 3043-956
isopad.info@thermocoax.com

USA :

THERMOCOAX Inc.

6825 Shiloh Road East,
Ste B-3
ALPHARETTA, GA 30005
Tél. : +1 800 298 3345
Fax : +1 678 947 4450
info@thermocoax.us

UK :

THERMOCOAX UK Ltd.

Office N° 5
Manor Farm
Aubourn,
Lincolnshire LN5 9DX
Tél. : +44 (1522) 789 900
Fax : +44 (1522) 789 902
info-uk@thermocoax.com

CHINA :

法国热缆公司
四川省成都市蛟龙工业港双流园
区涪江路11座
电话 : 13701325459
info-china@thermocoax.com

Important : All information, including illustrations, is believed to be reliable. Users, however, should independently evaluate the suitability of each product for their particular application. THERMOCOAX makes no warranties as to the accuracy or completeness of the information, and disclaims any liability regarding its use. THERMOCOAX only obligations are those in the THERMOCOAX Standard Terms and Conditions of Sale for this product, and in no case will THERMOCOAX or its distributors be liable for any incidental, indirect, or consequential damages arising from the sale, resale, use, or misuse of the product. Specifications are subject to change without notice. In addition, THERMOCOAX reserves the right to make changes—without notification to Buyer—to processing or materials that do not affect compliance with any applicable specification.