


Quartz-glass insulated heating tape

Isopad IT-H heating tape is suitable where high power input is needed or where work has to be carried out at high temperatures.

The high-quality quartz glass allows a working element temperature of up to 900°C. This tape should only be used in

dry atmospheres with additional electrical protection and always with a temperature regulator.

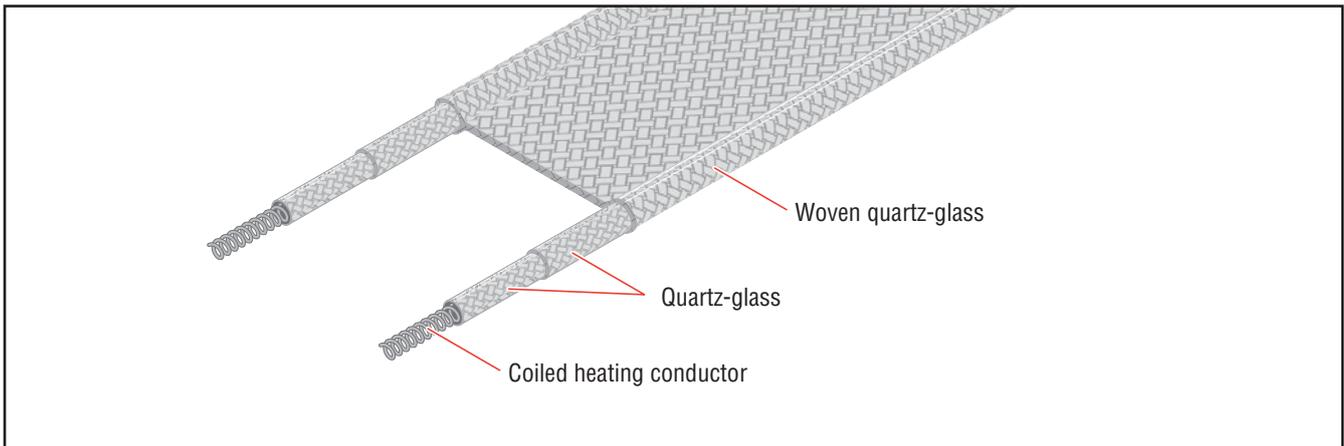

Area Specifications

Area classification	Nonhazardous, ordinary area
Ingress protection	IP20
Electrical protection class	See note
Maximum withstand temperature (power off)	900°C
Storage temperature	-40 to +50°C
Minimum installation temperature	-50°C

Note: These are components for further installation. The protective arrangements of Protection Class I or Class II must be followed during installation of the components and are the responsibility of the assembly company. Please refer to the manual for further information.

Standard Manufacturing Sizes

Width	30 mm ±10%
Thickness	6 mm ±10%

Heater Construction

Type	Resistance heating cable
Material	Nickel-chrome-alloy
Material of insulation	Quartz-glass
Material of outer sheath	Woven quartz-glass

Lead Connection

Connection length	0.35 m
Cross section	2 x 1.5 mm ²
Maximum operating temperature	450°C
Insulation material	Glass-silk

Technical Data

Frequency	50-60 Hz
Nominal operating voltage	230 Vac
Power per meter	Maximum 380 W/m
Maximum operating temperature	900°C
Minimum bend radius	15 mm
Minimum spacing	5 m

Ordering Information

	Part number	Length⁽¹⁾ (m)	Nominal Power⁽²⁾ (W)	Nominal Voltage (Vac)
Outer lengths and power specifications, etc., available upon request	740644-000	0.5	180	230
	802236-000	1.0	380	230
	433904-000	1.5	540	230
	965602-000	2.0	760	230
	890228-000	2.5	930	230
	444118-000	3.0	1090	230

⁽¹⁾ Tolerances <2000 mm ± (1% + 50 mm)
>2000 mm ± (2% + 100 mm)

⁽²⁾ Tolerances ±10%



France :
THERMOCOAX SAS
40 Bd Henri Sellier
F 92156 SURESNES Cedex
Tél. : +33 1 41 38 80 50
Fax : +33 1 41 38 80 70
info@thermocoax.com

Germany :
THERMOCOAX ISOPAD GmbH
Englerstrasse 11
D-69 126 HEIDELBERG
Tél. : +49 6221 3043-0
Fax : +49 6221 3043-956
isopad.info@thermocoax.com

USA :
THERMOCOAX Inc.
6825 Shiloh Road East,
Ste B-3
ALPHARETTA, GA 30005
Tél. : +1 800 298 3345
Fax : +1 678 947 4450
info@thermocoax.us

UK :
THERMOCOAX UK Ltd.
Office N° 5
Manor Farm
Aubourn,
Lincolnshire LN5 9DX
Tél. : +44 (1522) 789 900
Fax : +44 (1522) 789 902
info-uk@thermocoax.com

CHINA :
法国热缆公司
四川省成都市蛟龙工业港双流园
区涪江路11座
电话 : 13701325459
info-china@thermocoax.com

Important : All information, including illustrations, is believed to be reliable. Users, however, should independently evaluate the suitability of each product for their particular application. THERMOCOAX makes no warranties as to the accuracy or completeness of the information, and disclaims any liability regarding its use. THERMOCOAX only obligations are those in the THERMOCOAX Standard Terms and Conditions of Sale for this product, and in no case will THERMOCOAX or its distributors be liable for any incidental, indirect, or consequential damages arising from the sale, resale, use, or misuse of the product. Specifications are subject to change without notice. In addition, THERMOCOAX reserves the right to make changes—without notification to Buyer—to processing or materials that do not affect compliance with any applicable specification.