

NSM, NSP, NAB,
NEC, NST, NSE



- Easy to install
- Suited for universal use
- p_{max} : 15 bar; t_{max} : 150 °C
- Material:
PP, PTFE, stainless steel
- From density 0.5 kg/dm³




Application

Liquid levels can be easily monitored with the following float switch types.

Level control schemes can be implemented with at least two floats, whereby one operates as minimum contactor, and the other as maximum contactor. The switches are suited for applications where magnetic level switches are unsuitable due to the danger of the float jamming with dirt particles or deposits.

Depending on the shape of the float and the material used, extremely aggressive, hot, soiled or pasty media can also be monitored with float switches.

Application examples

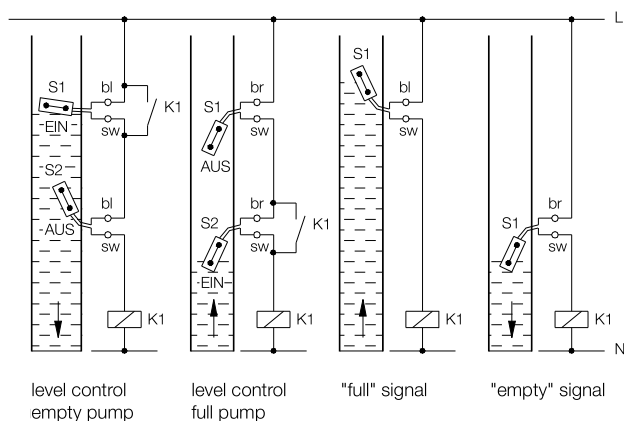

Description

The float comprises a hollow cylinder or a ball with integrated Reed contact or microswitch.

The switch is supplied as a changeover contact; it can be connected as a N/O contact or N/C contact as an option.

The contact switches when the liquid passes above or below the horizontal float position.

The switch point is set either by the side installation at the desired height, clamping at the desired level or when installed from the top weights attached to the cable.

Model summary

Model NSM

Reasonably-priced design

Material: polypropylene
Contact: microswitch
Cable: Neoprene, silicone
Max. temperature: 95 °C
Max. pressure: 3 bar

Model NSP

Ball or cylinder shape

Material: polypropylene
Contact: microswitch
Cable: TPK, silicone, FEP
Max. temperature: 85 °C
Max. pressure: 2 bar

Model NAB

Reasonably-priced design

Material: polypropylene
Contact: microswitch
Cable: Neoprene
Max. temperature: 85 °C
Max. pressure: 5 bar

Model NEC

Multichamber, practically unsinkable

Material: polypropylene,
option Hypalon coating
Contact: microswitch
Cable: Hypalon coating
Max. temperature: 85 °C
Max. pressure: 5.5 bar

Model NST...:

For hot, aggressive media

Material: PTFE
Contact: Reed contact
Cable: PTFE or silicone with PTFE bellows
Max. temperature: 150 °C
Max. pressure: 1 bar

Model NSE

For hot, aggressive media

Material: stainless steel 1.4571
Contact: Reed contact
Cable: silicone with stainless steel armour
Max. temperature: 150 °C
Max. pressure: 15 bar

Contact protection relais

We recommend the use of contact protection relays with our float switches.

- isolates float switch from high voltages
- interval control for automatic filling or emptying of tanks

Model MSR 10: 1 changeover contact
Model MSR 20: 2 changeover contacts
Model MSR 11: 1 changeover contact, bi-stable


Float Switches Model NSM, NSP

Model NSP...: Polypropylene




Application:	for liquids of all types; for example: soiled water, oil, weak acids or alkalis
Installation:	External, using a G 1 cable gland. The float can be introduced into open vessels from the top. The switch point is set using a weight.
Float material:	polypropylene
Cable:	standard 4 m TPK cable (3 x 0.75 mm ² , thermoplastic rubber) optional: silicone, FEP cable
Max. pressure:	Model NSP-S: 1 bar Model NSP-K: 2 bar
Max. temperature:	5... 60 °C (TPK cable) 5... 85 °C (silicone / FEP cable)
Medium density:	Model NSP-S: > 0.9 kg/dm ³ Model NSP-K: > 0.6 kg/dm ³
Contact:	changeover contact, connectable as N/C or N/O contact
Switch capacity:	max. 250 V _{AC} / 150 V _{DC} , 300 VA, 60 W 1 mA... 1.5 A, 1 A at cos φ 0.7
Switch. Hysteresis:	approx. 25 mm (TPK), approx. 35 mm (FEP)
Switch angle:	approx. +12°/+3°
Protection:	IP 68

Dimensions [mm] NSP-S

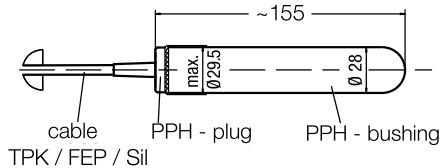

NSP-K

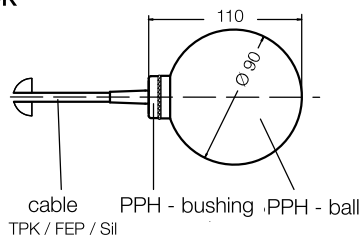

Minimum cable length*	
Cable type	Dimension X
TPK	70 mm
SIL	80 mm
FEP	110 mm


* Minimum cable length from the last fixing point

Model NSM...: Polypropylene



Application:	reasonably-priced float switch for liquids such as greases, solvents, weak acids and alkalis
Installation:	from the top in open vessels
Material:	float: polypropylene cable gland: polyamide
Cable:	standard: 2 m neoprene option: silicone
Max. pressure:	3 bar
Max. temperature:	60 °C neoprene 95 °C silicone cable
Mediumsdichte:	> 0.6 kg/dm ³
Contact:	microswitch, function changeover contact
Switch capacity:	max. 250 V _{AC} , max. 6 A, min. 100 mA
Protection:	IP 68
Hysteresis:	min. 140 mm, max. 500 mm

Dimensions [mm] NSM

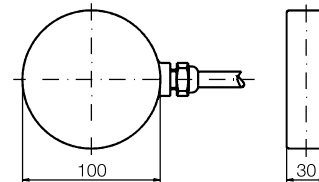

Order Details (Example: NSM-02 NEO)

Model	Description
NSM-02 NEO	Standard: 2 m neoprene cable
NSM-YY SIL	Option: silicone cable

(Please specify cable length in writing)

Order Details (Example: NSP-S W 04TPK)

Model	Design	Contact	Cable
NSP-	S = Stem form	W = changeover contact	04TPK = 4 m TPK cable
	K = Ball form		YYTPK = TPK cable, min. 2 m
			YYSIL = Silicone cable, min. 2 m
			YYFEP = FEP cable, min. 2 m

Order Details (Example: NSP-weights)

Model	Description
NSP-Beschwer	Bading weights
NSP-Anschl1PVC	PVC cable gland G 1
NSP-Anschl2PVC	PVC cable gland G 2
NSP-Anschl1MS	Brass cable gland G 1

Level Switches for Liquids Model NAB



Description


The KOBOLD level switch model NAB is ideally suited for the level monitoring of liquids and for direct pump control by means of a mechanical switch with very high switch capacity 20 (8) A at 250 V_{AC}.

The NAB comprises a stable plastic housing made of polypropylene (PP) with neoprene cable of optional 3 or 10 m of length.

Areas of application

- Level control of liquids
- Empty monitoring
- Feed monitoring
- Direct pump control
- Low-cost version for OEM applications


Electr. connection

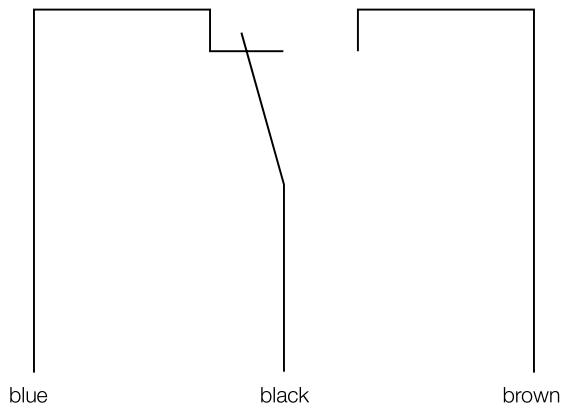

Technical Data

Float material:	Polypropylene (PP)
Cable material:	Neoprene
Length of cable:	3 and 10 m
Max. temperature:	85 °C
Max. pressure:	5 bar
Medium density:	0.5 ... 1.15 kg/dm ³
Contact:	Microswitch, changeover contact
Switch capacity:	20 A at resistive load 8 A at inductive load
Power supply:	250 V _{AC} , 50 / 60 Hz
Weight:	approx. 1200 g for 10 m cable
Actuating angle:	110° (55° from the horizontal plane in both directions)
Protection:	IP 68 (cable ends may not be immersed under water at any time)
Optional:	Ballast weight: Loaded resin, 175 g

Dimensions [mm]

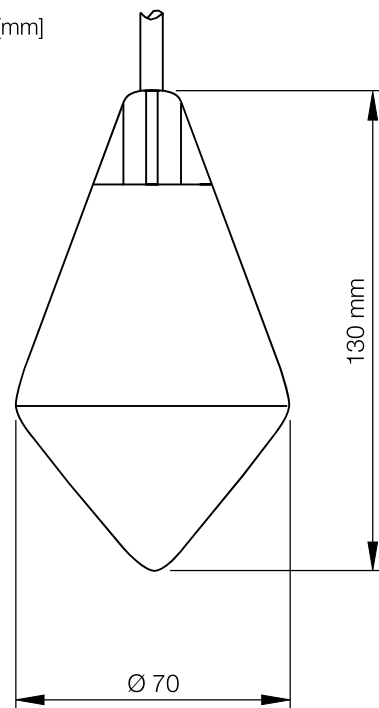

Order Details (Example: NAB-W03)

Model	Description
NAB-W03	Changeover contact, 3 m cable
NAB-W10	Changeover contact, 10 m cable
NAB-Beschwer	Ballast weight

Description

The KOBOLD level switches of model NEC have been developed for level monitoring of liquids and for direct pump control for all industrial applications.

The float is supplied with a mechanical microswitch with very large switching capacity.

The NEC comprises a stable plastic housing made of polypropylene with a total of five cavities sealed back-to-back. The instruments are thus practically unsinkable even when physically damaged.

The level switches are available in following basic designs:


- NEC-930: polypropylene float with mechanical contact, 5 m Hypalon cable
- NEC-HY930: float hypalon coated for aggressive media with mechanical contact, 5 m Hypalon cable
- NEC-930N10: polypropylene float, with mechanical contact, 10 m Hypalon cable

Technical Data


Float:	Double cone
Float material (standard model):	Polypropylene (PP)
Float material (HY model):	PP with Hypalon-coating
Cable:	3 x 1 mm ² , Hypalon
Contact:	microswitch, changeover contact 250 V _{AC} , 16 A resistive load, 6 A inductive load
Actuating angle:	± 25° from the horizontal
Medium density:	NEC: 0,7-1,15 kg/dm ³ NEC-HY: 0,8-1,10 kg/dm ³
Max. pressure:	NEC: 3.5 bar; NEC-HY: 4 bar
Max. temperature:	85 °C
Protection:	IP 68 (cable ends may not be immersed under water at any time)

All level switches of model NEC are supplied complete with ballast weight.

Electr. connection

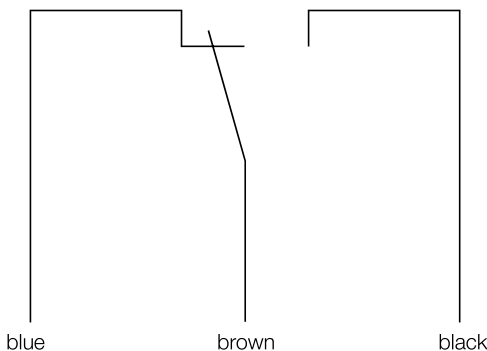

Dimensions [mm]

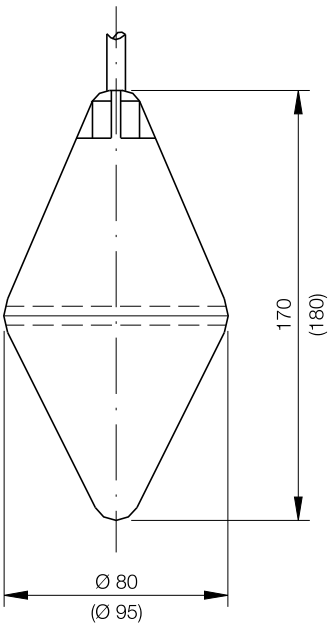

Order Details (Example: NEC-930)


Model	Float material / cable
NEC-	930 = PP/5 m Hypalon cable
	930N10 = PP/ 10 m Hypalon cable
	HY930 = PP hypalon coated / 5 m Hypalon cable

Model NST...: PTFE




Application:	for hot, extremely aggressive or dirty liquids
Installation:	From inside with G 1/2 connection (model NST-B only) or from outside with G 2 connection
Float material:	PTFE
Bellows:	PTFE (model NST-B only)
Cable:	Model NST-A: 2 m FEP cable Model NST-B: 2 m silicone or FEP cable
Max. pressure:	1 bar
Max. temperature:	150 °C (TPK cable)
Medium density:	0.79 kg/dm ³
Contact:	Reed contact, connectable as N/O or N/C
Switch capacity:	4 ... 250 V _{AC/DC} 1 mA ... 1 A, 60 VA
Switch. Hysteresis:	approx. 100 mm
Switch angle:	+20° / -20°
Protection:	IP 68

Dimensions [mm] NST-B

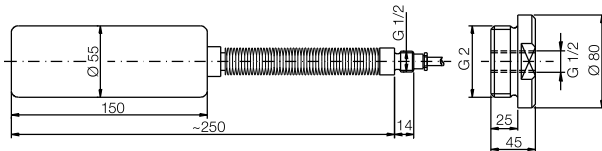

NST-A

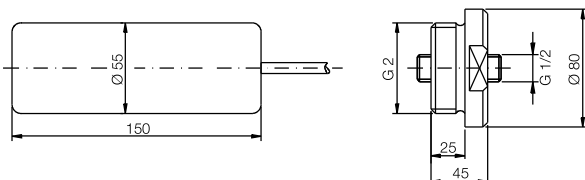

Order Details (Example: NST-AW 02 FEP)


Model	Description
NST-	AW 02 FEP = standard-design, 2 m FEP cable BW 02 FEP = PTFE bellows, 2 m FEP cable BW 02 SIL = PTFE bellows, 2 m SIL cable
NST-Anschl. R50A	PTFE cable gland, G 2, for standard design
NST-Anschl. R50B	PTFE cable gland, G 2, for bellows

Model NSE...: Stainless steel




Application:	for very aggressive, pasty or hot liquids
Installation:	from inside with G 1/2 connection or from outside with flange
Material:	Float: stainless steel 1.4571 Armour: stainless steel 1.4404 Wire mesh: stainless steel 1.4301 Screw fitting: stainless steel 1.4571
Cable:	2 m silicone cable, 270 mm of which with st. steel armour, 1.4541
Max. pressure:	NSE-D: 6 bar NSE-K: 15 bar
Max. temperature:	150 °C
Medium density:	>0.8 kg/dm ³
Contact:	Reed contact change-over connectable as N/O or N/C
Switch capacity:	4 ... 250 V _{AC/DC} 1 mA ... 1 A, 60 VA
Switch. Hysteresis:	approx. 100 mm
Switch angle:	+20° / -20°
Protection:	IP 68

Dimensions [mm] NSE-D

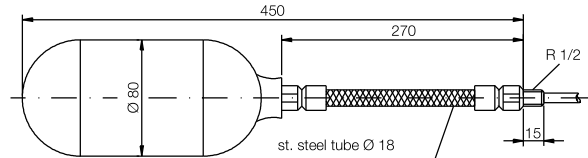

NSE-K

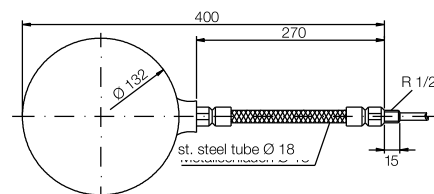

Order Details (Example: NSE-DW 02 SIL)

Model	Description
NSE-DW 02 SIL	Cylindrical float, 2 m silicone cable
NSE-KW 02 SIL	Ball float, 2 m silicone cable