

TECHNICAL DATASHEET

Base set BS-1




Areas of application

- For short and temporary use
- For low-viscosity, non-flammable liquids, thinned acids and alkalis

Contents of delivery

- 1 x Motor p310-A-230
- 1 x Pump tube PP DL-PP-A-Niro-1000
- 1 x 2 m hose PVC reinforced ND 19
- 1 x Hose connector PP ND 19
- 2 x Hose clamps SS 316Ti
- 1 x Nozzle PP/FPM/SS ND 19
- 1 x Barrel adapter PP
- 1 x Wall bracket

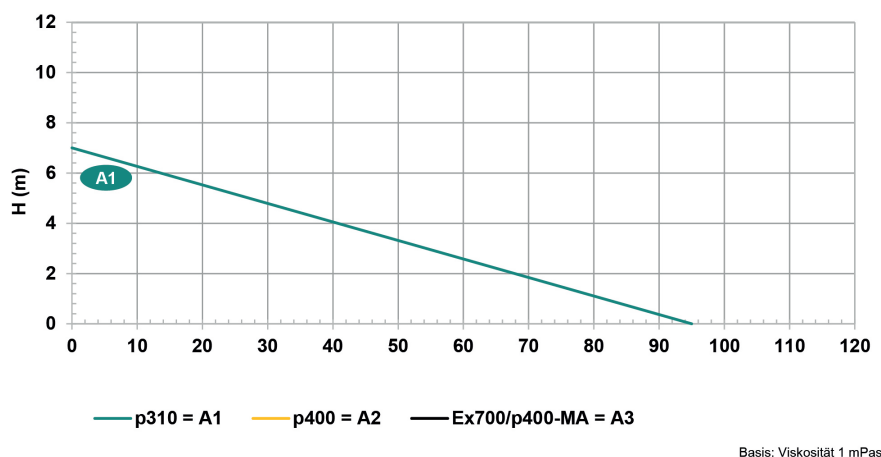

TECHNICAL DATA

Flow rate	max. 95 l/min
Power	520 W
Voltage	230 V
Plunge depth	1000 mm
Item No.	410-0002

Resistant to, among others:

Adipic acid	Aluminium fluoride	Aluminium oxide
Formic acid	Ammonium hydroxide	Benzoic acid
Boric acid	Calcium hydroxide	Dextrin
Iron (II) sulphate	Ethylene glycol	Glucose
Glycerine	Silicic acid	Cyanide of copper
other media on request		

