

TECHNICAL DATASHEET

Chemistry set CS-1




Areas of application

- For frequent use and long operating times
- For almost all low-viscosity, non flammable chemicals

Contents of delivery

- 1 x Motor p400-A-230
- 1 x Pump tube PVDF DL-PVDF-A-HC-1000
- 1 x 2 m Hose universal-chemical ND25
- 2 x Hose connector PVDF ND25
- 2 x Hose clamps SS 316Ti
- 1 x Nozzle PVDF/FEP 1 1/4"
- 1 x Barrel adapter PP
- 1 x Wall bracket

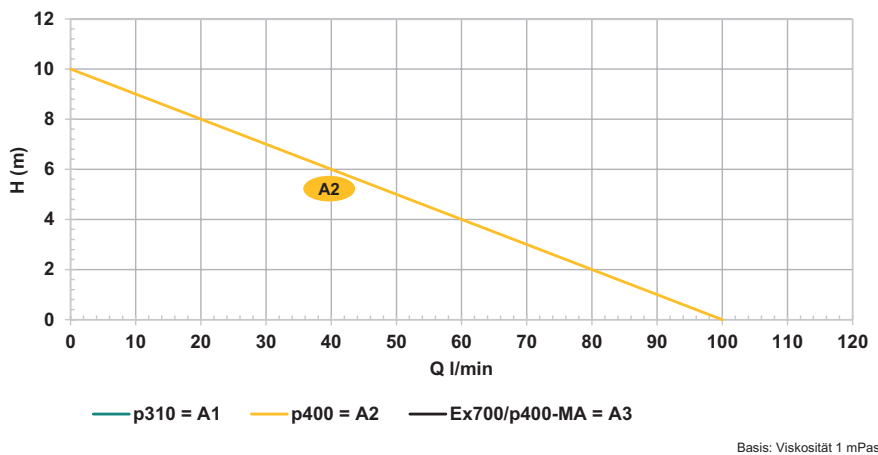

TECHNICAL DATA

Flow rate	max. 100 l/min
Power	850 W
Voltage	230 V
Plunge depth	1000 mm
Item No.	420-0002

Resistant to, among others:

Battery acid	Ammonium acetate	Arsenic acid
Benzenesulfonic acid	Succinic acid	Bromotrifluoromethane
Calcium bisulphite	Chloroacetic acid	Chromium salts
Dichloroacetic acid	Diesel petrol	Diglycolic acid
Iron (III) sulphate	Formaldehyde solution	Antifreeze (motor vehicle)
other media on request		

