


## Accessories for pneumatic atomizing nozzles Series 136.1 to 136.6




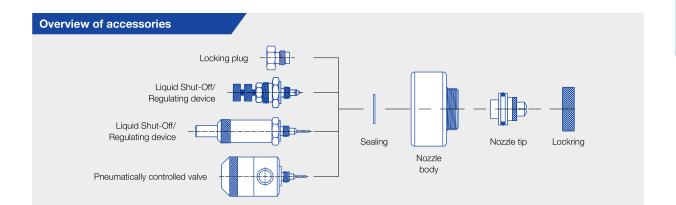

## Regulating device and shut-off needle Enables manual regulation of the flow rate and closing of the nozzle. Material: Stainless steel 303 Weight: 33 g

| Ordering no. | Suitable for<br>all nozzles of<br>series 136 |
|--------------|--|
| Туре         |  |
| 013.600.16   |  |

5/16-24 UNF-2A

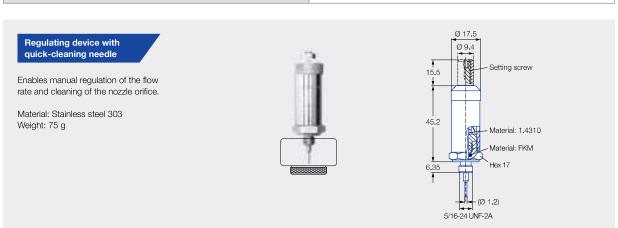

| Ordering no.  |             | Needle diameter |
|---------------|-------------|-----------------|
| Туре          | For nozzles | D<br>[mm]       |
| 013.601.16.30 | 136.xx1     | 2.1             |
| 013.602.16.30 | 136.xx2     | 1.2             |
| 013.603.16.30 | 136.xx3     | 0.8             |
| 013.604.16.30 | 136.xx4     | 0.6             |
| 013.605.16.30 | 136.xx5     | 0.4             |
| 013.606.16.30 | 136.xx6     | 0.3             |






## Pneumatically controlled valve. Opening pressure 2.1 bar, max. 180 cycles/min.

External control system via separate compressed air connection for switching the nozzle on and off.

Material: Stainless steel 303 Weight: 230 g





| <b>Ordering no.</b><br>Type | For nozzles | Needle diameter<br>D<br>[mm] |
|-----------------------------|-------------|------------------------------|
| 013.601.16.10               | 136.xx1     | 2.1                          |
| 013.602.16.10               | 136.xx2     | 1.2                          |
| 013.603.16.10               | 136.xx3     | 0.8                          |
| 013.604.16.10               | 136.xx4     | 0.6                          |
| 013.605.16.10               | 136.xx5     | 0.4                          |
| 013.606.16.10               | 136.xx6     | 0.3                          |