

2000-A | 2000-B | 2000-C

A multi-purpose pump designed for transferring clean or contaminated fluids without abrasive particles (suitable for all non corrosive and non abrasive fluids).

Applications

- ▶ filling solar collectors
- ▶ irrigation
- ▶ rain water harvesting
- ▶ domestic water supply
- ▶ drain flooded basements
- ▶ decanting barrels
- ▶ sewerage disposal
- ▶ fuelling vehicles
- ▶ draining waste oil
- ▶ dispose off cooling lubricants
- ▶ draining water beds
- ▶ car wash
- ▶ cleaning tanks
- ▶ draining tanks


Fluids

- ▶ water, seawater
- ▶ waste water
- ▶ diesel fuel, biodiesel
- ▶ vegetable oils
- ▶ heating and motor oil
- ▶ detergents
- ▶ antifreeze
- ▶ heat transfer fluid
- ▶ cooling lubricants



UNISTAR 2000-A/B

Characteristic curves:

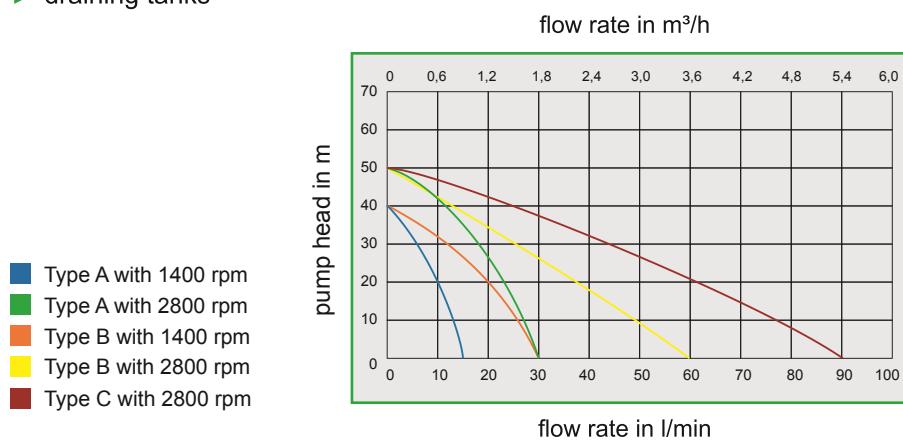

UNISTAR 2000-C
bidirectional motor as standard

Technical details

UNISTAR	2000-A								2000-B								2000-C									
Flow rate max. (l/min)	15	30	15	30	15	30	15	30	30	60	30	60	30	60	30	60	90									
Pressure max. (bar)*	4	5	4	5	4	5	4	5	4	5	4	5	4	5	4	5	5									
connections	$\frac{3}{4}$ "												1"													
Volt	230		400		12		24		230		400		12		24		230	400								
rpm	1.400	2.800	1.400	2.800	1.500	3.000	1.500	3.000	1.400	2.800	1.400	2.800	1.500	3.000	1.500	3.000	2.800									
Ampere	3,2	2,1	1,9	39	42	12	18	4,4	4	2,8	2,4	50	49	23	8,8	2,7										
motor power	0,37 kW				0,25 kW				0,55 kW				0,37 kW				1,1 kW									
temperature max.	90°C								90°C								90°C									
weight	9 kg								9,2 kg								13 kg									

* with Perbunan-Impeller